


STORAGE TANK DISHED ENDS

STORAGE END Type A
Shallow 'tank style' ends for storage or atmospheric vessels. Generally in accordance with BS2594.

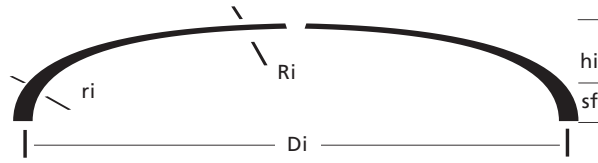

Di/Do mm	Ri mm	ri mm	Thk Min Max	hi mm	Vol litres
400	480	40	2 - 8	70	5
500	750	40	2 - 8	72	9.5
600	914	40	2 - 8	80	15
700	1000	40	2 - 10	91	23
800	1220	40	2 - 10	97	31
900	1372	40	2 - 13	105	42
1000	1524	40	2 - 13	118	56
1100	1524	40	2 - 13	130	75
1200	1676	40	2 - 16	139	94
1300	1676	40	2 - 16	158	123
1400	2134	40	3 - 16	147	135
1500	2134	40	3 - 16	164	170
1600	2134	40	3 - 16	183	213
1700	2134	40	3 - 16	203	263
1800	2438	40	3 - 16	200	291
1900	2438	40	3 - 16	219	352
2000	2438	40	3 - 22	241	423
2100	3048	40	3 - 22	215	423
2200	3048	40	3 - 22	233	499
2300	3048	40	3 - 22	252	585
2400	3048	40	3 - 22	273	684
2500	3048	40	3 - 22	294	795
2750	3810	40	3 - 22	284	934
3000	4500	40	4 - 22	286	1118
3250	4500	40	4 - 22	331	1501
3500	5000	40	4 - 22	344	1804
3750	5000	40	5 - 22	391	2337
4000	6000	40	5 - 22	371	2531
4250	6000	100	5 - 22	458	3763
4500	6000	100	6 - 22	505	4593
4750	6000	100	6 - 22	556	4869
5000	7000	100	6 - 22	530	5928
5250	7000	100	6 - 22	579	7053
5500	7000	100	6 - 22	629	8342
5750	7000	100	6 - 22	683	9817
6000	7000	100	6 - 22	739	11495

All intermediate diameters are possible.

hi and vol are theoretical and given for guidance only.

Ri will vary slightly on spun heads.

Volumes & heights do not include straight flange.

Straight flange available up to a maximum of 75mm, dependent on material thickness.